


KAC50DP

50KW modular power converter

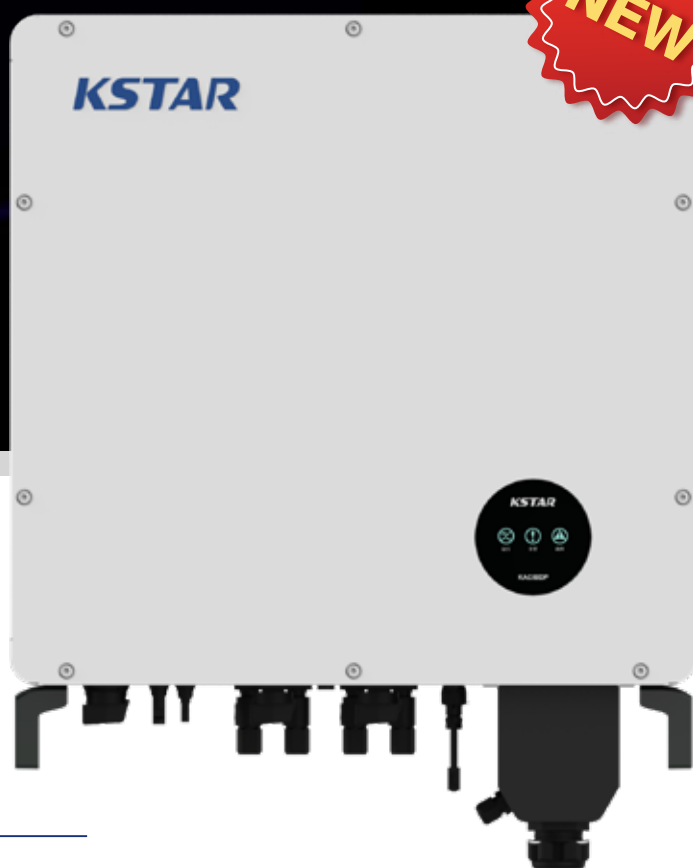

Highlight

Flexible configuration

- Modular design, expanding as required
- Small&light, wall mounted
- Installed in parallel for Expansion

Powerful function

- Support PV+ESS
- Grid support, equipped with SVG technology
- On-grid and off-grid operation

Reliable protection

- Outdoor IP65 design
- Sufficient protection functions equipped

Product Specifications	KAC50DP
PV Side	
Max. Input Voltage	1000V
MPPT Voltage Range	350V~800V
Max. Current per MPPT	36A
Number of MPPT	3
Number of Inputs Per MPPT	2
Battery Side	
Max. Input Voltage	750V
Min. Input Voltage	350V
DC Voltage at Nominal Operation	500V~750V
Max. DC Current	55A*2
Max. DC Input Power	55kW
Number of DC Inputs	2
AC Side(On Grid)	
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Max. AC Current	80A
Nominal AC Voltage	400V
AC Voltage Range	340V~440V
Nominal Grid Frequency/Frequency Range	50/60Hz±5Hz
THDv	<3%(100% Load)
Adjustable PF Range	-1(Lagging)~1(Leading)
AC Side(Off Grid)	
Nominal AC Voltage	230/400V±3%; 3L+N+PE
THDv	<3%(Linear Load)
Nominal Grid Frequency/Frequency Range	50/60Hz
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Efficiency	
Max. Efficiency	97.5%
Protection	
Reverse Connection Protection	Yes
DC Switch	Yes
Over-Temperature Protection	Yes
Grid Monitoring/ Earthing Fault Detection	Yes
Insulation Monitoring	Yes
DC/AC Surge Protection	DC Type II;AC Type III
General Parameters	
Dimensions(WxHxD)	650*715*325mm
Weight	75KG
Topology	Transformerless
IP Protection	IP65
Operation Temperature Range	-25~60°C(>45°C Derating)
Operation Humidity Range	0~100%(No Condensing)
Cooling Method	Intelligent Air Cooling
Max. Operation Altitude	3000m
Communication Port	RS485/CAN
Standards	IEC62477;IEC61000;CE;GB/T;IEC62109;IEC61683;IEC60068;IEC61727;IEC62116;EN50549;VDE4105;G99

